

PAM410

Phase Angle Meter




- **Designed for power system applications**
- **Current and voltage inputs**
- **Compact and lightweight**
- **Local calibration**
- **Easy to use**

Description


The PAM410 is specifically designed for measurements on electrical power systems. It is capable of displaying the phase angle relationship between two power signals, which can be two currents, two voltages or any combination. Currents up to 25 A and voltages up to 500 V can be applied directly to the instrument. The current input range can be extended by using external current transformers.

Application

The PAM410 is suitable for checking polyphase metering installations, testing protective relays, make comparative test in electrical substations, and verifying the phase angle deviation on power transformers.

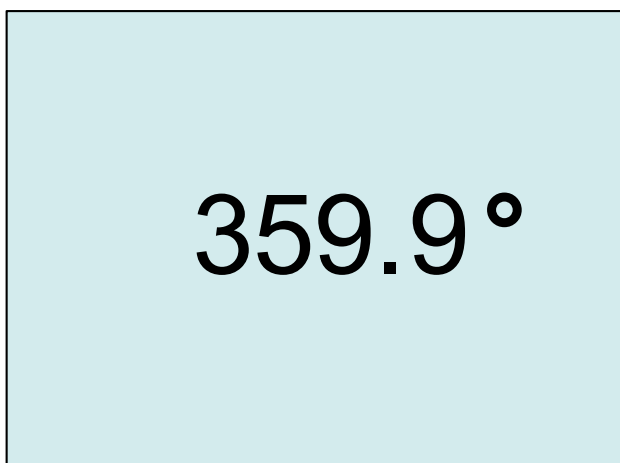

Example of phase angle shown on display

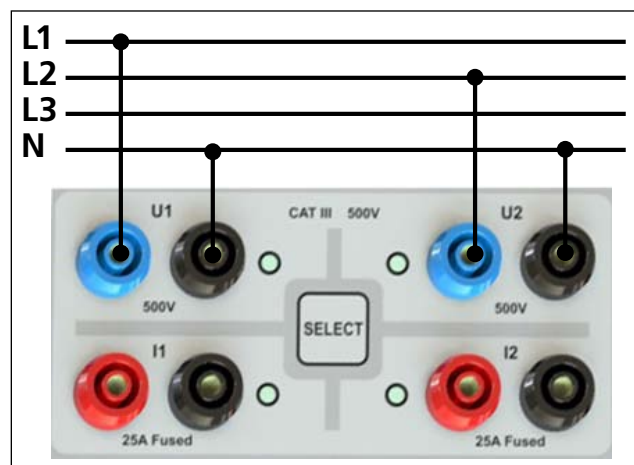

Application example of the PAM410

Features and benefits

- Direct digital reading down to tenths of a degree (0.1°) – does not require calculation or interpretation.
- Designed for use in substation or industrial environments – transport case provided for rugged protection.
- Switchable inputs between current and voltage – allows phase angle of any combination of two power signals to be measured giving broad application capability.
- Local calibration

Specifications PAM410

Specifications are valid at nominal input voltage and an ambient temperature of +25°C, (77°F). Specifications are subject to change without notice.

Environment

<i>Application field</i>	The instrument is intended for use in high-voltage substations and industrial environments.
<i>Temperature</i>	
<i>Operating</i>	-10°C to +50°C (14°F to +122°F)
<i>Storage & transport</i>	-40°C to +70°C (-40°F to +158°F)
<i>Humidity</i>	5% – 95% RH, non-condensing
<i>Altitude</i>	< 2000 m above sea level

CE-marking

<i>EMC</i>	2004/108/EC
<i>LVD</i>	2006/95/EC

General

<i>Measurement category</i>	CAT III 500 V CAT IV 300 V
<i>Enclosure class</i>	IP21
<i>Mains adapter</i>	100–240 V AC, 50/60 Hz
<i>Adapter output voltage</i>	9 V DC
<i>Power consumption</i>	10 W (max)
<i>Dimensions</i>	
<i>Instrument</i>	260 x 140 x 55 mm (except handle) (10.2" x 5.5" x 2.2")
<i>Transport case</i>	390 x 300 x 140 mm (15.4" x 11.8" x 5.5")
<i>Weight</i>	1.1 kg (2.4 lbs) 3.4 kg (7.5 lbs) with accessories and transport case
<i>Test lead set, with 4 mm stackable safety plugs</i>	Black 2 x 2 m (6.6 ft), 2.5 mm ² Red 2 x 2 m (6.6 ft), 2.5 mm ²
<i>Display</i>	Alpha numerical LC display with backlighter

Measurement section

Phase angle

<i>Range</i>	0 – 359.9°(2–500 V and 0.15–25 A)
<i>Type of phase angle measurement</i>	Current-current, voltage-voltage and current-voltage
<i>Waveform</i>	Sinusoidal
<i>Resolution</i>	0.1°
<i>Inaccuracy</i>	±0.5° at >10% of voltage/current range ±1° at 2–10% of voltage/current range ±2° at 1–2% of voltage/current range

Ordering information	
Item	Art. No.
PAM410 Incl. Test lead set, mains adapter and transport case	BP-39090

SWEDEN
Megger Sweden AB
Eldarvägen 4, Box 2970
SE-187 29 TÄBY
T +46 8 510 195 00
F +46 8 510 195 95
E seinfo@megger.com

UK
Archcliffe Road Dover
CT17 9EN England
T +44 (0) 1304 502101
F +44 (0) 1304 207342

Other Technical Sales Offices
Dallas USA, Norristown USA,
Toronto CANADA, Trappes FRANCE,
Oberursel GERMANY, Johannesburg
SOUTH AFRICA, Kingdom of BAHRAIN
Mumbai INDIA, Chonburi THAILAND
Sydney AUSTRALIA

Registered to ISO 9001 and 14001
Subject to change without notice.
Art.No. ZI-BP02E • Doc. BP0129AE • 2012
PAM410_DS_en_V01
www.megger.com
Megger is a registered trademark